




# Kraus & Naimer

BLUE LINE switchgear

since 1907

**CATALOG 130** 06/2008

## DH, DHR, DK, DKR Switches 6 A-16 A

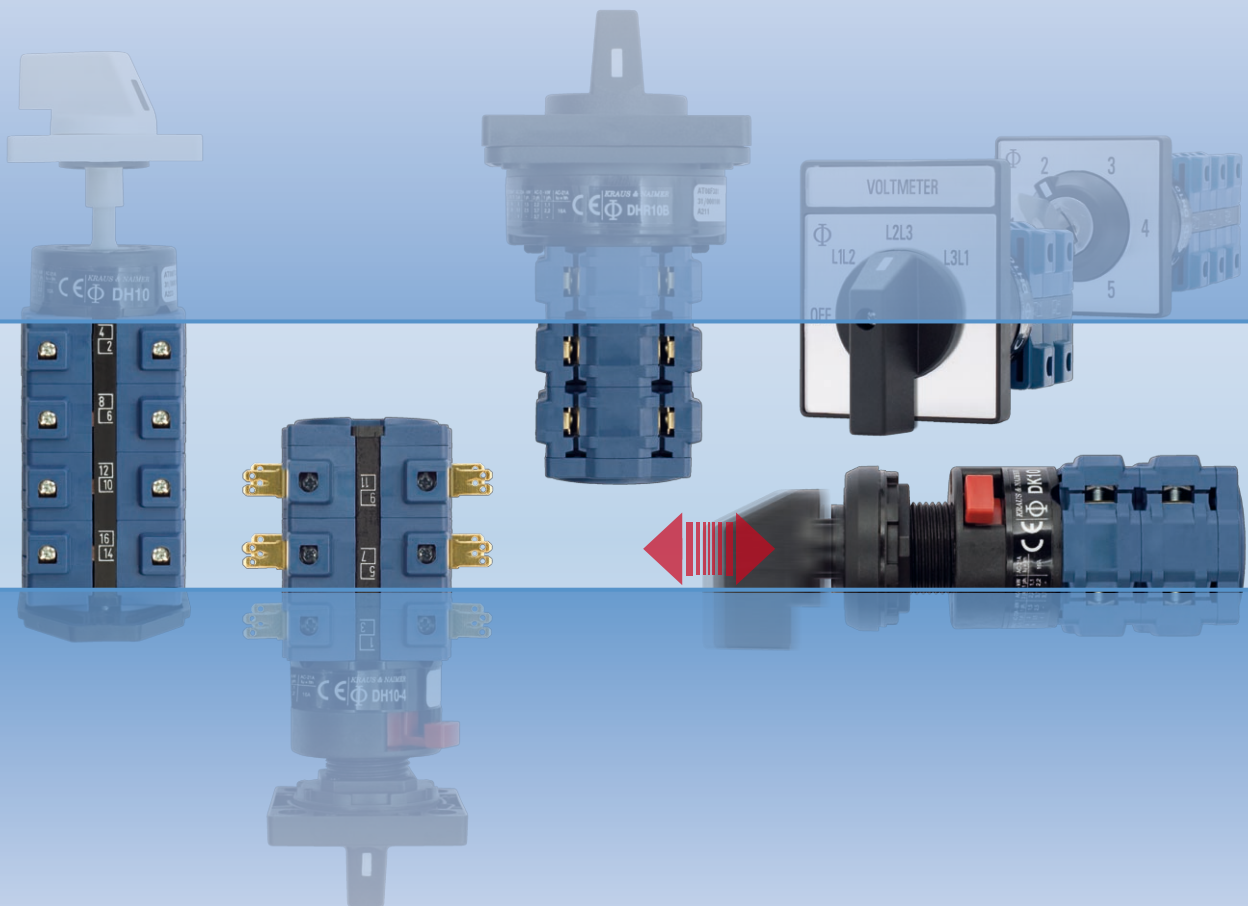

---

# Kraus & Naimer

The development of the Blue Line rotary switch, contactor and motor starter product ranges is based on more than seventy-five years experience by Kraus & Naimer in the design and manufacture of electrical switchgear. Kraus & Naimer pioneered the introduction of the cam operated rotary switch and continues to be recognized as the world leader in that product field.

## BLUE LINE

Blue Line products are protected by numerous patents throughout the industrial world. They are built to national and international standards and designed to withstand adverse temperatures and climates.

Blue Line products are accepted and universally recognized for their quality and workmanship. They are supported by a worldwide sales and service organization.

The Kraus & Naimer Registered Trademark



WORLDWIDE SYMBOL  
FOR QUALITY SWITCHGEAR

---

---

Disconnectors and Main Switches acc. to IEC 60947-3 see Catalog 500

<b>Contents</b>	<b>Page</b>
Construction Data	2
Dimensions and Nominal Ratings	3
How to order	4, 5
Switch Function and Configuration	
DH, DHR Switches (Turn to operate)	
ON/OFF Switches	6, 7
Double-throw Switches	8, 9
Multi-step Switches	10-12
General Application Switches	13
Voltmeter Switches	14-16
Ammeter Switches	16, 17
Volt-ammeter Switches	18
Control Switches	18, 19
Motor Switches	19-21
DK, DKR Switches (Push to turn)	
Multi-step Switches	22-25
Voltmeter Switches	26, 27
Ammeter Switches	28
Control Switches	28
Types of Mounting	
Panel Mounting	29-31
Base Mounting	32
Wall Mounting	33
Escutcheon Plates	34, 35
Handles	36
International Standards and Approvals	37
Technical Data	38, 39
Dimensions	
Panel Mounting	40, 41
Base Mounting	41, 42
Wall Mounting	43
Overall Switch Lengths	43
Blue Line Switchgear: Summary	44

---

## Construction Data

Cam switches of the DH, DHR, DK and DKR series are designed for universal applications and may ideally be used for control switches, instrumentation switches and circuit interrupters. Different contact designs, contact materials and terminals allow their use in electronic circuitry as well as in aggressive environments in accordance with IEC 60947-3, EN 60947-3 and VDE 0660 part 107.

Fully enclosed contact chambers provide optimum protection from dust and other contaminants.

The stage is the basis for all switches and can be supplied with a maximum of 2 contacts. The terminals are accessible from the side. All switches in this series are supplied with open terminals and are finger-proof according to VDE 0106,

part 100 (VBG 4). Captive plus-minus terminal screws and integrated screwdriver guides facilitate wiring. Alternatively, the switches of the DH and DK series can be supplied with integrated quick connect terminals. Each quick connect terminal may accept either one 6.3 mm or two 2.8 mm quick connect lugs.

For connection with ring type terminals the DHR and DKR series of switches are available. These switches are supplied with large open terminals, which allow for connection without the need of removing the screws.

### 2 Contact Systems




Fig. 1





Fig. 2


A rigid double-break bridge with silver alloy contacts (DH10, DHR10, DK10, DKR10, DH10B, DHR10B) provides high making and breaking capabilities for regular control applications. (Fig. 1)

Self-cleaning H-bridges with a cross-wire contact system are used for electronic and low voltage range applications. They are available with either silver contacts (DH12, DHR12, DK12, DKR12, DH12B, DHR12B) or gold-plated contacts (DH11, DHR11, DK11, DKR11, DH11B, DHR11B). This contact system offers maximum contact security, low resistance and virtually chatter free switching. (Fig. 2)

### 2 Methods of Contact Operation

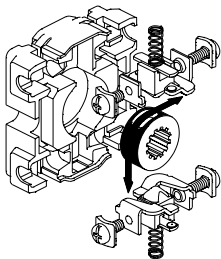

Turning

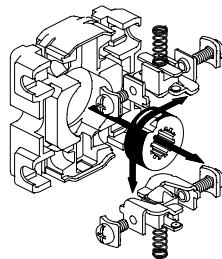

Turning and Pushing

The contacts of the switches of the DH and DHR series can be manually operated by turning and the DK and DKR series by turning and/or pushing. This versatility of handle movement permits a countless variety of contact arrangements. Special pre-select programs enable the operator to rotate the handle to any one of up to 12 positions, while bypassing contact operation in all intermediate positions. Momentary contact operation for a pre-selected position occurs only when the handle is depressed. Releasing the handle returns switch operation to the normal plane.



Type	Size	Possible Switching Angles	Max. No. of Stages
DH10-DHR12	S0	30°, 45°, 60°, 90°	12
DK10-DKR12	S0	30°, 60°, 90°	9
DH10B-DHR12B	S1	30°, 45°, 60°, 90°	12

### DH and DK-series



### DHR and DKR-series

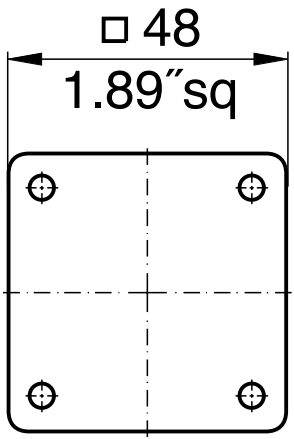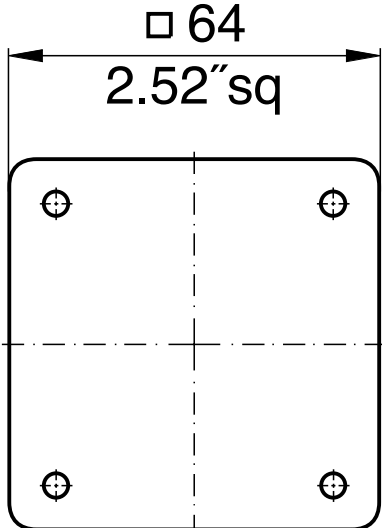

Switch Size	Type	According to IEC/EN 60947-3 and VDE 0660 part 107		
		Operational Voltage <sup>1</sup> min.-max. $U_e$	Thermal Current $I_u/I_{th}$	Operational Current $I_e$ 220 V-240 V AC-15
		V	A	A
<b>S0</b>  	<b>DH10</b> <b>DH11</b> <b>DH12</b> <b>DHR10</b> <b>DHR11</b> <b>DHR12</b>	Operation by turning		
	20-690	16	5	
	1 <sup>2</sup> -600	6	-	
	6-600	6	-	
	20-690	16	5	
	1 <sup>2</sup> -600	6	-	
	6-600	6	-	
	Operation by turning/pushing			
	<b>DK10</b>	20-690	16	5
	<b>DK11</b>	1 <sup>2</sup> -600	6	-
	<b>DK12</b>	6-600	6	-
	<b>DKR10</b>	20-690	16	5
	<b>DKR11</b>	1 <sup>2</sup> -600	6	-
	<b>DKR12</b>	6-600	6	-
<b>S1</b>  	<b>DH10B</b> <b>DH11B</b> <b>DH12B</b> <b>DHR10B</b> <b>DHR11B</b> <b>DHR12B</b>	Operation by turning		
	20-690	16	5	
	1 <sup>2</sup> -600	6	-	
	6-600	6	-	
	20-690	16	5	
	1 <sup>2</sup> -600	6	-	
	6-600	6	-	

For further technical details, refer to pages 38 and 39.  
To furnish with gold contacts and quick connects, refer to page 4.

<sup>1</sup>Valid for lines with grounded common neutral termination, overvoltage category III, pollution degree 3. Values for other supply systems on request. <sup>2</sup>Values for lower voltages on request.

## How to order

Disconnectors and Main Switches according to IEC 60947-3 see Catalog 500

Three types of data (shown below) are required for ordering Blue Line cam-operated switches. Code numbers for ordering are shown in this catalog.

### 1. Type of Switch

The type of switch required may be easily selected by referring to the table on page 3 which shows the thermal current, power rating and dimensions of each switch. For further technical details, refer to pages 38 and 39. Variations of contacts and terminals are shown below.

### 2. Switch Function

The code numbers for standard switches shown on pages 6-28 indicate the switch function, escutcheon plate, handle and any optional extras.

Additional coding to modify type and color of handle and escutcheon plate is explained below.

### 3. Type of Mounting

Types of mounting are shown on pages 29-33. Catalog **101** describes enclosures and optional extras.

Specify the mounting code to indicate required mounting.

**DH10**

**A202-600**

**VE**

## Type of Switch

Extending the switch type coding the following combinations will define:

Amendment	Definition	For switch types
-1	with gold contacts <sup>1</sup>	DH10, DHR10, DK10, DKR10, DH10B, DHR10B
-4	with integrated quick connects	DH10, DH11, DH12, DK10, DK11, DK12, DH10B, DH11B, DH12B
-5	with integrated quick connects and gold contacts	DH10, DK10, DH10B

**Example:** Coding for switch type **DH10** with gold contacts is **DH10-1**.

## Modification of Switches

The part number for switch function and options may be modified in cases where items are required other than standard. The modification may involve the escutcheon plate inscription, color combination of escutcheon plate and handle, type of escutcheon plate and handle or the optional extra.

Switch Size	Escutcheon Plate Frame	Handle	Escutcheon Plate Backing	Escutcheon Plate Lettering	Dash Number
S0, S1	electro-gray	electro-gray	brushed alu	black	-100
S0, S1	electro-gray	electro-gray	black	mat silver	-500
S0, S1	black	black	brushed alu	black	-600
S0, S1	black	black	black	mat silver	-700

<sup>1</sup>Technical data on request.

## How to order

### Modification of Switches

The standard switch consists of a transparent escutcheon plate with brushed aluminum backing and black inscription. The escutcheon plate frame is black as well as the handle. Page 4 shows further color combinations of escutcheon plate and handle which are available. The appropriate dash number must be substituted in the switch function coding to specify other color combinations as required.

**Example:** The complete coding for switch type CG8 with a 3 pole ON/OFF switch function, electro-gray handle and electro-gray escutcheon plate frame with brushed aluminum backing and black inscription which reads 0-1 is as follows: **DH10 A202-100 E**.

#### Special programs for escutcheon plate and handle combinations

- **.00** = without escutcheon plate, without handle
- **.01** = without escutcheon plate
- **.02** = without handle
- **.03** = with square escutcheon plate without lettering
- **.04** = with rectangular escutcheon plate without lettering
- **.05** = with square escutcheon plate without lettering and without handle
- **.06** = with rectangular escutcheon plate without lettering and without handle
- **.07** = standard escutcheon plate, without lettering on rectangular section
- **.08** = with F-handle
- **.09** = with P-handle
- **.10** = escutcheon plate frame and fixation ring only (if using switches with single hole mounting: - **.16**)
- **.11** = without escutcheon plate, but with handle bearing plate
- **.12** = with yellow escutcheon plate backing and red handle
- **.14** = with B-handle
- **.16** = escutcheon plate frame and fixation ring only if using switches with single hole mounting
- **.17** = standard escutcheon plate and rectangular add-on escutcheon plate if using switches with single hole mounting FT2

**Example:** The complete coding for switch type DH10 with a 3 pole ON/OFF switch function with electro-gray escutcheon plate frame, square escutcheon plate without lettering, brushed aluminum plate backing and electro-gray handle reads as follows: **DH10 A202-103 E**.

### Handles, Escutcheon Plates and Optional Extras

The handles for standard switches shown on pages 6-28 are suitable for mounting units with four hole panel mounting. Alternative types of handles available are illustrated on pages 29-33.

When a handle, escutcheon plate or optional extra is required but not covered by the dash number, the code number for the selected component should be entered separately. A comprehensive range of available standard escutcheon plates is illustrated on pages 34-36. Non-standard or special escutcheon plate engravings are available at extra cost. The large number of optional extras and enclosures is covered in Catalog **101**.

### Switch Size

DH, DHR, DK and DKR switches are available in sizes S0 and S1. These size codes indicate the dimension of the mounting, the escutcheon plate and the handle, as well as the size of optional devices and enclosures. Page 3 lists these sizes and the various switch types they include.

### Ordering of Special Switches and Escutcheon Plates

When ordering special switches and special escutcheon plates, we recommend the use of our ordering form as shown in this example.

Contacts may be operated in 2 plains. Consequently, each contact has two columns in which the required contact function is to be indicated. The shaded column indicates function of the contact with depressed handle. This means that the switch handle may be depressed in each switching position. Rotation of the handle is possible only in the depressed position.

Contacts 1-2, 3-4, 11-12 and 5-6, 7-8, 9-10 close in position 1 or 3. Depressing the handle will not change the contact function. In position 1 or 3 contact 13-14 is closed. This contact opens if the handle is depressed.

		D	CODE NO.																																																																																																																																																																																																																																																																																																																																																																																																																																					
<table border="1"> <thead> <tr> <th>POSITIONS</th> <th>1</th> <th>2</th> <th>3</th> </tr> </thead> <tbody> <tr><td>1</td><td>X</td><td>X</td><td>X</td></tr> <tr><td>2</td><td>X</td><td>X</td><td>X</td></tr> <tr><td>3</td><td>X</td><td>X</td><td>X</td></tr> <tr><td>4</td><td></td><td></td><td></td></tr> <tr><td>5</td><td></td><td></td><td></td></tr> <tr><td>6</td><td></td><td></td><td></td></tr> <tr><td>7</td><td></td><td></td><td></td></tr> <tr><td>8</td><td></td><td></td><td></td></tr> <tr><td>9</td><td></td><td></td><td></td></tr> <tr><td>10</td><td></td><td></td><td></td></tr> <tr><td>11</td><td></td><td></td><td></td></tr> <tr><td>12</td><td></td><td></td><td></td></tr> </tbody> </table>		POSITIONS	1	2	3	1	X	X	X	2	X	X	X	3	X	X	X	4				5				6				7				8				9				10				11				12				<table border="1"> <thead> <tr> <th>JUMPERS</th> <th>1</th> <th>2</th> <th>3</th> <th>4</th> <th>5</th> <th>6</th> <th>7</th> <th>8</th> <th>9</th> <th>10</th> <th>11</th> <th>12</th> <th>13</th> <th>14</th> <th>15</th> <th>16</th> <th>17</th> <th>18</th> <th>19</th> <th>20</th> <th>21</th> <th>22</th> <th>23</th> <th>24</th> <th>25</th> <th>26</th> <th>27</th> <th>28</th> <th>29</th> <th>30</th> <th>31</th> <th>32</th> <th>33</th> <th>34</th> <th>35</th> <th>36</th> </tr> </thead> <tbody> <tr><td>1</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td></tr> <tr><td>2</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td></tr> <tr><td>3</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td></tr> <tr><td>4</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td></tr> <tr><td>5</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td></tr> <tr><td>6</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td></tr> <tr><td>7</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td></tr> <tr><td>8</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td></tr> <tr><td>9</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td></tr> </tbody> </table>		JUMPERS	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	1	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	2	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	3	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	4	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	5	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	6	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	7	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	8	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	9	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
POSITIONS	1	2	3																																																																																																																																																																																																																																																																																																																																																																																																																																					
1	X	X	X																																																																																																																																																																																																																																																																																																																																																																																																																																					
2	X	X	X																																																																																																																																																																																																																																																																																																																																																																																																																																					
3	X	X	X																																																																																																																																																																																																																																																																																																																																																																																																																																					
4																																																																																																																																																																																																																																																																																																																																																																																																																																								
5																																																																																																																																																																																																																																																																																																																																																																																																																																								
6																																																																																																																																																																																																																																																																																																																																																																																																																																								
7																																																																																																																																																																																																																																																																																																																																																																																																																																								
8																																																																																																																																																																																																																																																																																																																																																																																																																																								
9																																																																																																																																																																																																																																																																																																																																																																																																																																								
10																																																																																																																																																																																																																																																																																																																																																																																																																																								
11																																																																																																																																																																																																																																																																																																																																																																																																																																								
12																																																																																																																																																																																																																																																																																																																																																																																																																																								
JUMPERS	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36																																																																																																																																																																																																																																																																																																																																																																																																				
1	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○																																																																																																																																																																																																																																																																																																																																																																																																					
2	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○																																																																																																																																																																																																																																																																																																																																																																																																				
3	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○																																																																																																																																																																																																																																																																																																																																																																																																				
4	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○																																																																																																																																																																																																																																																																																																																																																																																																				
5	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○																																																																																																																																																																																																																																																																																																																																																																																																				
6	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○																																																																																																																																																																																																																																																																																																																																																																																																				
7	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○																																																																																																																																																																																																																																																																																																																																																																																																				
8	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○																																																																																																																																																																																																																																																																																																																																																																																																				
9	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○																																																																																																																																																																																																																																																																																																																																																																																																				
TYPE OF MOUNTING	FT2	OPTIONAL EXTRAS																																																																																																																																																																																																																																																																																																																																																																																																																																						
ESCUTCH. PL.																																																																																																																																																																																																																																																																																																																																																																																																																																								
HANDLE, COLOR	G 251																																																																																																																																																																																																																																																																																																																																																																																																																																							
LATCH. MECH.																																																																																																																																																																																																																																																																																																																																																																																																																																								
STOP																																																																																																																																																																																																																																																																																																																																																																																																																																								
CAMS																																																																																																																																																																																																																																																																																																																																																																																																																																								
NO. OF STAGES		SIG.																																																																																																																																																																																																																																																																																																																																																																																																																																						
1 POLE	2 POLE	DATE																																																																																																																																																																																																																																																																																																																																																																																																																																						
		COMPANY																																																																																																																																																																																																																																																																																																																																																																																																																																						

Order forms are available on request.

Function	Escutch. Plate	Type/Handle		Code	Stages	Connection Diagram
		DH10- DHR12	DH10B- DHR12B			

## ON/OFF Switches with 60° Switching

1 pole				A200-600	1	
2 pole				A201-600	1	
3 pole				A202-600	2	
3 pole with red handle				A202-626	2	
3 pole with V850 padlock attachment				A202-627	2	
4 pole				A203-600	2	
5 pole				A341-600	3	
6 pole				A342-600	3	
7 pole				A343-600	4	
8 pole				A344-600	4	
9 pole				A345-600	5	
10 pole				A346-600	5	
11 pole			A347-600	6		
12 pole			A348-600	6		
1 pole				A200-620	1	
2 pole				A201-620	1	
3 pole				A202-620	2	
4 pole				A203-620	2	
5 pole				A341-620	3	
6 pole				A342-620	3	
7 pole				A343-620	4	
8 pole				A344-620	4	
9 pole				A345-620	5	
10 pole				A346-620	5	
11 pole				A347-620	6	
12 pole				A348-620	6	
1 pole				A200-621	1	<p>1-12 pole</p>
2 pole				A201-621	1	
3 pole				A202-621	2	
4 pole				A203-621	2	
5 pole				A341-621	3	
6 pole				A342-621	3	
1 pole				A200-622	1	
2 pole				A201-622	1	
3 pole				A202-622	2	
4 pole				A203-622	2	
5 pole				A341-622	3	
6 pole				A342-622	3	
1 pole				A200-623	1	
2 pole				A201-623	1	
3 pole				A202-623	2	
4 pole				A203-623	2	
5 pole				A341-623	3	
6 pole				A342-623	3	
1 pole				A200-624	1	
2 pole				A201-624	1	
3 pole				A202-624	2	
4 pole				A203-624	2	
5 pole				A341-624	3	
6 pole				A342-624	3	
1 pole				A200-625	1	
2 pole				A201-625	1	
3 pole				A202-625	2	
4 pole				A203-625	2	
5 pole				A341-625	3	
6 pole				A342-625	3	



# Switch Function and Configuration

# DH, DHR Switches

Turn to operate

Function	Escutch. Plate	Type/Handle DH10- DH10B- DHR12 DHR12B	Code	Stages	Connection Diagram
----------	----------------	---	------	--------	--------------------

## ON/OFF Switches with 90° Switching

1 pole contacts 2 pole preclose 30° 3 pole				A290-600 A291-600 A292-600	1 1 2		
4 pole 4 pole 1 pole preclose 60° 4 pole 3 pole preclose 30°				A324-600 A293-600 A327-600	2 2 2		1, 2, 3, 4, 5 and 6 pole
5 pole contacts 6 pole preclose 30°				A325-600 A326-600	3 3		
1 pole contacts 2 pole preclose 30° 3 pole				A290-620 A291-620 A292-620	1 1 2		4 pole 1 pole preclose 60°
4 pole 4 pole 1 pole preclose 60° 4 pole 3 pole preclose 30°				A324-620 A293-620 A327-620	2 2 2		
5 pole contacts 6 pole preclose 30°				A325-620 A326-620	3 3		4 pole 3 pole preclose 30°
3 pole 360° rotation				A208-600 A208-620	2 2		
3 pole for foot operation				A386-600	2		

## ON/OFF Switches with Spring Return to „OFF“ 30° Switching

1 pole 2 pole 3 pole 4 pole				A204-600 A205-600 A206-600 A207-600	1 1 2 2		1-4 pole
--------------------------------------	--	--	--	--	------------------	--	----------

Function	Escutch. Plate	Type/Handle DH10- DH10B- DHR12 DHR12B	Code	Stages	Connection Diagram
----------	----------------	---	------	--------	--------------------

**Double-throw Switches without „OFF“ 60° Switching**

1 pole				A220-600	1	
2 pole				A221-600	2	
3 pole				A222-600	3	
4 pole				A223-600	4	
5 pole				A369-600	5	
6 pole				A370-600	6	
7 pole				A371-600	7	
8 pole				A372-600	8	
9 pole				A373-600	9	
10 pole				A374-600	10	
11 pole				A375-600	11	
12 pole				A376-600	12	

**Double-throw Switches without „OFF“ with electrically isolated contacts**

1 pole				A720-600	1		1-4 pole
2 pole				A721-600	2		
3 pole				A722-600	3		
4 pole				A723-600	4		
1 pole with spring return				A795-600	1		1 pole with spring return

**Double-throw Switches with Spring Return to Center**

1 pole				A295-600	1		1-3 pole
2 pole				A296-600	2		
3 pole				A297-600	3		
1 pole				A295-620	1		1-3 pole
2 pole				A296-620	2		
3 pole				A297-620	3		

**Double-throw Switches with Center „OFF“ 60° Switching**

1 polig				A210-600	1	
2 polig				A211-600	2	
3 polig				A212-600	3	
4 polig				A213-600	4	
5 polig				A361-600	5	
6 polig				A362-600	6	
7 polig				A363-600	7	
8 polig				A364-600	8	

Function	Escutch. Plate	Type/Handle		Code	Stages	Connection Diagram
		DH10- DHR12	DH10B- DHR12B			

**Double-throw Switches with Center „OFF“ 60° Switching**

1 pole 2 pole 3 pole 4 pole 5 pole 6 pole 7 pole 8 pole				A210-620 A211-620 A212-620 A213-620 A361-620 A362-620 A363-620 A364-620	1 2 3 4 5 6 7 8	
1 pole 2 pole 3 pole				A210-621 A211-621 A212-621	1 2 3	
1 pole 2 pole 3 pole				A210-622 A211-622 A212-622	1 2 3	
1 pole 2 pole 3 pole				A210-623 A211-623 A212-623	1 2 3	
1 pole 2 pole 3 pole 4 pole				A210-624 A211-624 A212-624 A213-624	1 2 3 4	

**Double-throw Switches with Center „OFF“ 90° Switching**

1 pole contacts 2 pole preclose 30° 3 pole 4 pole 1 pole preclose 60°				A218-600 A219-600 A299-600 A294-600	1 2 3 4	
1 pole 2 pole 3 pole 4 pole 1 pole preclose 60°				A218-620 A219-620 A299-620 A294-620	1 2 3 4	

**Double-throw Switches with Center „OFF“ and electrically isolated contacts**

1 pole 2 pole 3 pole 4 pole				A710-600 A711-600 A712-600 A713-600	1 2 3 4	
1 pole with spring return 2 pole to center				A714-600 A715-600	1 2	

**Double-throw Switches with Spring Return to Center**

1 pole with spring return 2 pole to center 3 pole				A214-600 A215-600 A216-600	1 2 3	
1 pole 2 pole 3 pole				A214-620 A215-620 A216-620	1 2 3	
1 pole with spring return 2 pole from left to center 3 pole				A320-600 A321-600 A322-600	1 2 3	

Function	Escutch. Plate	Type/Handle		Code	Stages	Connection Diagram
		DH10-DHR12	DH10B-DHR12B			

Multi-step Switches without „OFF“

1 pole 3 Step 2 pole 3 pole 4 pole 5 pole 6 pole				A230-600 A250-600 A270-600 A476-600 A484-600 A489-600	2 3 5 6 8 9	
1 pole 4 Step 2 pole 3 pole 4 pole 5 pole 6 pole				A231-600 A251-600 A271-600 A477-600 A485-600 A490-600	2 4 6 8 10 12	
1 pole 5 Step 2 pole 3 pole 4 pole				A232-600 A252-600 A272-600 A478-600	3 5 8 10	
1 pole 6 Step 2 pole 3 pole				A233-600 A253-600 A273-600	3 6 9	
1 pole 7 Step 2 pole 3 pole				A234-600 A254-600 A274-600	4 7 11	
1 pole 8 Step 2 pole 3 pole				A235-600 A255-600 A275-600	4 8 12	
1 pole 9 Step				A236-600	5	
1 pole 10 Step				A237-600	5	
1 pole 11 Step				A238-600	6	
1 pole 12 Step				A239-600	6	

# Switch Function and Configuration

# DH, DHR Switches

Turn to operate

Function	Escutch. Plate	Type/Handle	Code	Stages	Connection Diagram
		DH10- DH10B- DHR12 DHR12B			

## Multi-step Switches without „OFF“ with electrically isolated contacts

1 pole 3 Step				A730-600	2	 1 pole
2 pole				A750-600	3	 2 pole
1 pole 4 Step				A731-600	2	 1 pole
2 pole				A751-600	4	 2 pole

## Multi-step Switches with „OFF“

1 pole 2 Step				A240-600	1	 1-6 pole
2 pole				A260-600	2	
3 pole				A280-600	3	
4 pole				A480-600	4	
5 pole				A486-600	5	
6 pole				A491-600	6	
1 pole				A240-620	1	 1-6 pole
2 pole				A260-620	2	
3 pole				A280-620	3	
4 pole				A480-620	4	
5 pole				A486-620	5	
6 pole				A491-620	6	
1 pole 3 Step				A241-600	2	 1 and 2 pole
2 pole				A261-600	3	
3 pole				A281-600	5	
4 pole				A481-600	6	
5 pole				A487-600	8	
1 pole				A241-620	2	 3 pole
2 pole				A261-620	3	
3 pole				A281-620	5	
4 pole				A481-620	6	
5 pole				A487-620	8	
1 pole				A241-621	2	 4 pole
2 pole				A261-621	3	
						 5 pole

Function	Escutch. Plate	Type/Handle		Code	Stages	Connection Diagram
		DH10- DHR12	DH10B- DHR12B			

### Multi-step Switches with „OFF“

1 pole 4 Step 2 pole 3 pole 4 pole				A242-600 A262-600 A282-600 A482-600	2 4 6 8	
1 pole 2 pole 3 pole 4 pole				A242-620 A262-620 A282-620 A482-620	2 4 6 8	1-4 pole
1 pole 5 Step 2 pole 3 pole				A243-600 A263-600 A283-600	3 5 8	
1 pole 2 pole 3 pole				A243-620 A263-620 A283-620	3 5 8	1-3 pole
1 pole 6 Step 2 pole 3 pole				A244-600 A264-600 A284-600	3 6 9	
1 pole 2 pole 3 pole				A244-620 A264-620 A284-620	3 6 9	1-3 pole
1 pole 7 Step 2 pole				A245-600 A265-600	4 7	
1 pole 2 pole				A245-620 A265-620	4 7	1 pole      2 pole
1 pole 8 Step				A246-600	4	
1 pole				A246-620	4	
1 pole 9 Step				A247-600	5	
1 pole				A247-620	5	
1 pole 10 Step				A248-600	5	
1 pole				A248-620	5	
1 pole 11 Step				A249-600	6	
1 pole				A249-620	6	

Function	Escutch. Plate	Type/Handle	Code	Stages	Connection Diagram
		DH10- DH10B- DHR12 DHR12B			

General Application Switches

1 pole 2 Gang 2 pole Switching sequence: 3 pole 0, A, A+B				A310-600 A312-600 A314-600	1 2 3	 1 pole  2 pole
1 pole 2 pole 3 pole				A310-620 A312-620 A314-620	1 2 3	 3 pole
1 pole 3 Gang 2 pole Switching sequence: 3 pole 0, A, A+B, A+B+C				A311-600 A313-600 A315-600	2 3 5	 1 pole  2 pole
1 pole 2 pole 3 pole				A311-620 A313-620 A315-620	2 3 5	 3 pole
1 pole 2 Gang 2 pole Series switching 3 pole Switching sequence: 0, A, B, A+B				A330-600 A331-600 A332-600	1 2 3	 1 pole  2 pole
1 pole 2 pole 3 pole				A330-620 A331-620 A332-620	1 2 3	 3 pole
2 pole 2 Gang Series-parallel Switching				A339-600	2	 2 pole
Switching sequence: 0, A+B series, A, A+B parallel				A339-620	2	 2 pole

Function	Escutch. Plate	Type/Handle DH10- DH10B- DHR12 DHR12B	Code	Stages	Connection Diagram
----------	----------------	---	------	--------	--------------------

### Voltmeter Switches without „OFF“

3 phase 3 wire			A023-600	2	
			A023-620	2	
3 phase 3 wire 3 phase to phase and phase to neutral			A025-600	3	
			A025-620	3	

### Voltmeter Switches with „OFF“

2 pole 360° rotation			A002-600	1	
3 phase 3 wire			A004-600	2	
			A004-620	2	
			A004-621	2	
			A004-622	2	
			A004-623	2	
			A004-624	2	
			A011-600	2	



# Switch Function and Configuration

# DH, DHR Switches

Turn to operate

Function	Escutch. Plate	Type/Handle	Code	Stages	Connection Diagram
		DH10- DH10B- DHR12 DHR12B			

## Voltmeter Switches with „OFF“

3 phase to neutral				A005-600	2	
				A005-620	2	
				A005-621	2	
				A005-622	2	
				A005-623	2	
3 phase to phase and 3 phase to neutral				A007-600	3	
				A007-620	3	
				A007-621	3	
				A007-622	3	
				A007-623	3	
				A007-624	3	
2 separate 3 phase with center „OFF“				A008-600	4	
				A008-620	4	
				A008-621	4	
				A008-622	4	

Function	Escutch. Plate	Type/Handle	Code	Stages	Connection Diagram
		DH10- DH10B- DHR12 DHR12B			

## Voltmeter Switches with „OFF“

3 phase and 1 phase to neutral				A010-600	3	
				A010-620	3	
				A010-621	3	
				A010-622	3	

## Ammeter Switches

Single pole with one current transformer				A046-600	1	
				A046-620	1	
				A046-621	1	
Single pole with 3 current transformers without „OFF“				A017-600	3	
				A017-620	3	
Single pole with 3 current transformers with „OFF“ 360° rotation				A048-600	3	
				A048-620	3	
				A048-621	3	
				A048-622	3	
				A048-623	3	

Function	Escutch. Plate	Type/Handle	Code	Stages	Connection Diagram
		DH10- DH10B- DHR12 DHR12B			

**Ammeter Switches**

Single pole with 2 current transformers (3 readings)				A021-600	2	
				A021-620	2	
Single pole with 4 current transformers				A036-600	4	
				A036-620	4	
2 pole 2 current transformers				A037-600	3	
				A037-620	3	
				A037-621	3	
2 pole 3 current transformers				A019-600	5	
				A019-620	5	
				A038-600	5	
2 pole 3 current transformers				A038-600	5	
				A038-620	5	
				A038-621	5	
2 pole 4 current transformers				A039-600	6	
				A039-620	6	

Function	Escutch. Plate	Type/Handle DH10- DH10B- DHR12 DHR12B	Code	Stages	Connection Diagram
----------	----------------	---	------	--------	--------------------

## Volt-ammeter Switches

3 phase - phase to phase 3 current				A027-600	6	
				A028-600	7	
3 phase voltage 3 phase current 4 wire				A033-600	5	
3 phase voltage 3 phase current 3 wire				A035-600	5	

## Control Switches

Stop switch				A174-600	1	
Start switch				A175-600	1	
Stop start switch single pole				A176-600	1	
Stop start switch 2 pole				A183-600	2	
Stop start switch with spring return from start to run				A178-600	1	
				A178-620	1	
Stop start switch with spring return to run for 2 units				A177-600	2	
				A177-620	2	
Stop start switch with spring return to run with contactor interlock contactors for 2 units				A182-600	2	
				A182-620	2	
Motor voltage control switch				A150-600	2	

Function	Escutch. Plate	Type/Handle	Code	Stages	Connection Diagram
		DH10- DH10B- DHR12 DHR12B			

**Control Switches with electrically isolated contacts**

Stop start switch single pole				A789-600	1	
Stop start switch with spring return to 1				A791-600	1	
Stop start switch with spring return to run for 2 units				A790-600	2	
Contactor control with spring return to „OFF“				A179-600	2	
				A179-620	2	
Circuit breaker control				A537-600	2	

**Motor Reversing Switches**

2 pole				A400-600	2	
				A400-620	2	
				A400-621	2	
3 pole				A401-600	3	
				A401-620	3	
				A401-621	3	
3 pole with spring return to „OFF“				A228-600	3	
				A228-620	3	
3 pole for use with reversing contactors				A402-600	4	

Function	Escutch. Plate	Type/Handle	Code	Stages	Connection Diagram
		DH10- DH10B- DHR12 DHR12B			

## Star-delta Switches

OFF-star-delta				A410-600	4	
				A410-620	4	
Reversing				A413-600	5	
With auxiliary contact closed in „OFF“ position				A416-600	5	
For use with reversing contactors				A419-600	4	

## Motor Control Switches

2 speed single winding				A440-600	4	
				A440-620	4	
2 speed single winding without „OFF“				A466-600	4	
2 speed single winding with center „OFF“				A441-600	4	
				A441-620	4	
2 speed single winding reversing				A442-600	6	
				A442-620	6	
2 speed single winding for use with contactors				A444-600	5	
				A444-620	5	

# Switch Function and Configuration

# DH, DHR Switches

Turn to operate

Function	Escutch. Plate	Type/Handle DH10- DH10B- DHR12 DHR12B	Code	Stages	Connection Diagram
----------	----------------	---	------	--------	--------------------

## Motor Control Switches

2 speed 2 winding 0-A-B $\Upsilon$ or $\Delta$				A451-600	3	
				A451-620	3	
3 speed 2 winding 0-A $\Delta$ -B $\Upsilon$ -A $\Upsilon\Upsilon$				A457-600	6	
				A457-620	6	

## Start and Run Switches

Split-phase start				A425-600	2	
				A425-620	2	
Split-phase start reversing				A426-600	3	
				A426-620	3	
Split-phase reversing, auto cut-out of start field winding				A622-600	3	

Function	Escutch. Plate	Handle	Code	Stages	Connection Diagram
----------	----------------	--------	------	--------	--------------------



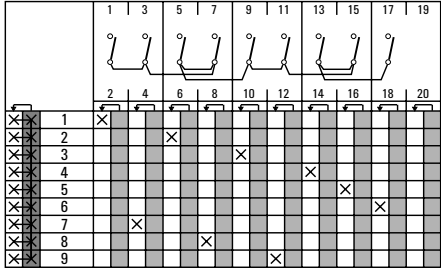



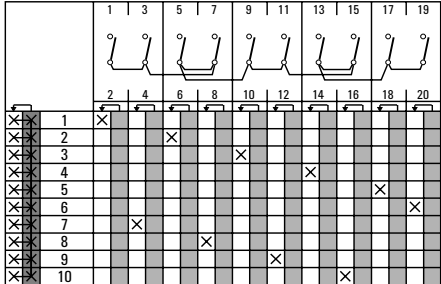



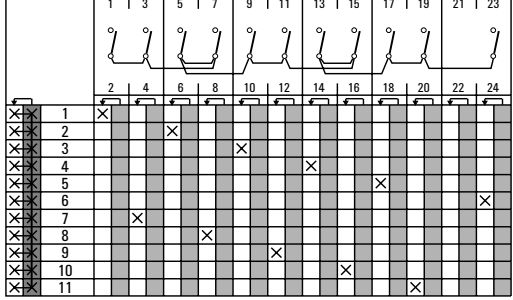



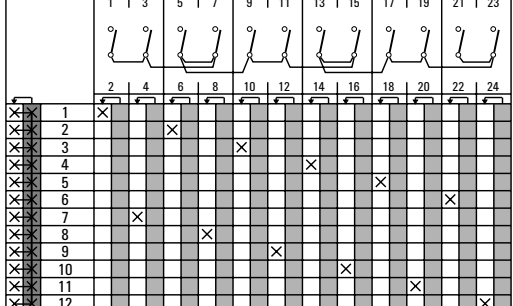

## Multi-step Switches without „OFF“

1 pole 3 Step			A830-600	2	
1 pole 4 Step			A831-600	2	
1 pole 5 Step			A832-600	3	
1 pole 6 Step			A833-600	3	
1 pole 7 Step			A834-600	4	
1 pole 8 Step			A835-600	4	



Function	Escutch. Plate	Handle	Code	Stages	Connection Diagram
----------	----------------	--------	------	--------	--------------------

Multi-step Switches without „OFF“

1 pole 9 Step			A836-600	5	 
1 pole 10 Step			A837-600	5	 
1 pole 11 Step			A838-600	6	 
1 pole 12 Step			A839-600	6	 

Rotation only in pushed position. Contacts are closed only in normal position. Therefore, one or more positions of a multi-step switch can be passed without contact operation.

Function	Escutch. Plate	Handle	Code	Stages	Connection Diagram
----------	----------------	--------	------	--------	--------------------

## Multi-step Switches with „OFF“

1 pole 2 Step			A840-600	1		
			A840-620	1		
1 pole 3 Step			A841-600	2		
			A841-620	2		
1 pole 4 Step			A842-600	2		
			A842-620	2		
1 pole 5 Step			A843-600	3		
			A843-620	3		
1 pole 6 Step			A844-600	4		
			A844-620	4		
1 pole 7 Step			A845-600	4		
			A845-620	4		

Function	Escutch. Plate	Handle	Code	Stages	Connection Diagram
----------	----------------	--------	------	--------	--------------------

### Multi-step Switches with „OFF“

1 pole 8 Step			A846-600	4	
			A846-620	4	
1 pole 9 Step			A847-600	5	
			A847-620	5	
1 pole 10 Step			A848-600	5	
			A848-620	5	
1 pole 11 Step			A849-600	6	
			A849-620	6	

Rotation only in pushed position. Contacts are closed only in normal position. Therefore, one or more positions of a multi-step switch can be passed without contact operation.

Function	Escutch. Plate	Handle	Code	Stages	Connection Diagram
----------	----------------	--------	------	--------	--------------------

### Voltmeter Switches with „OFF“

For 2 measuring ranges by additional NO and NC contacts operated by pushing handle			A804-600	3	
			A804-620	3	
			A804-621	3	
			A804-622	3	
			A804-623	3	
			A804-624	3	
For 2 measuring ranges by additional NO and NC contacts operated by pushing handle			A805-600	3	
			A805-620	3	
			A805-621	3	
			A805-622	3	
			A805-623	3	
For 2 measuring ranges by additional NO and NC contacts operated by pushing handle			A807-600	5	
			A807-620	5	
			A807-621	5	
			A807-622	5	
			A807-623	5	
			A807-624	5	



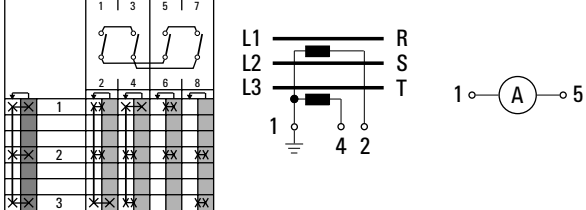
Function	Escutch. Plate	Handle	Code	Stages	Connection Diagram
----------	----------------	--------	------	--------	--------------------

**Voltmeter Switches with „OFF“**



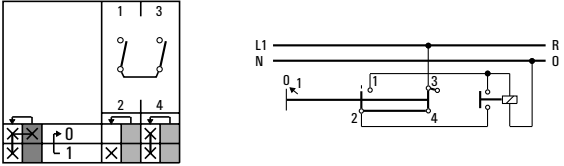


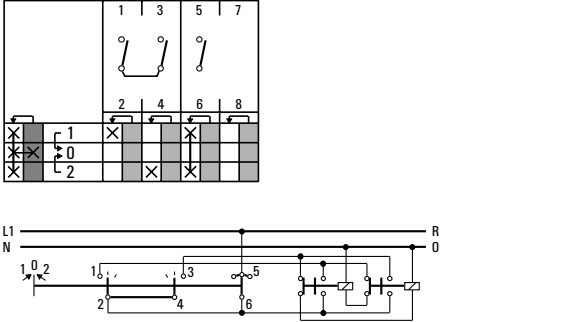






(as A804) for 2 measuring ranges by additional NO contact operated by pushing handle			A814-600	3	 
			A814-620	3	
			A814-621	3	
			A814-622	3	
			A814-623	3	
			A814-624	3	
(as A805) for 2 measuring ranges by additional NO contact operated by pushing handle			A815-600	3	 
			A815-620	3	
			A815-621	3	
			A815-622	3	
			A815-623	3	
(as A807) for 2 measuring ranges by additional NO contact operated by pushing handle			A817-600	4	 
			A817-620	4	
			A817-621	4	
			A817-622	4	
			A817-623	4	
			A817-624	4	

Function	Escutch. Plate	Handle	Code	Stages	Connection Diagram
----------	----------------	--------	------	--------	--------------------




## Ammeter Switches

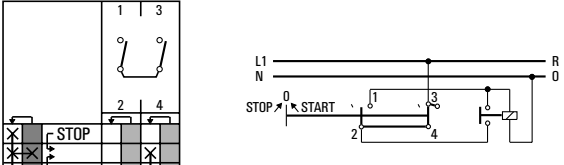Single pole with 2 current transformers (3 readings)			A021-600	2	
--	---	---	----------	---	--

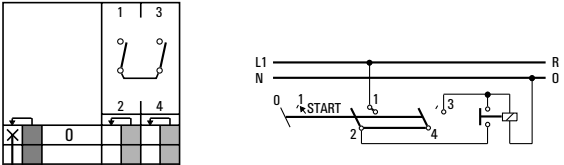

## Control Switches

Control switch for contactor control, closing by rotating, tripping by pushing in „OFF“ position			A874-600	1	
Control switch for 2 NO and 1 NC contacts			A875-600	2	
Control switch 1pole with additional emergency cut-out by pushing in „OFF“ position			A876-600	1	
Control switch stop start switch with spring return from start to position 1, with additional emergency cut-out by pushing in position 1			A878-600	1	






Two or Four Hole Panel Mounting	Terminals rotated 90°	Code	DH.. DHR..	DH..B DHR..B	DK.. DKR..
---------------------------------	-----------------------	------	---------------	-----------------	---------------

	Panel mounting				
	Four hole panel mounting	●	E E-V	● ●	● ●
	Four hole panel mounting, protection IP 65	●	EF EF-V	● ●	● ●
	Two hole panel mounting, protection IP 65	●	E22 E22-V	● ●	
	Panel mounting using larger escutcheon plate and handle and with heavy duty latching				
	Four hole panel mounting		EG	●	
	Four hole panel mounting, protection IP 65		EGF	●	
	Panel and base mounting				
	Four hole mounting, protection IP 40		ER	●	●
	Four hole mounting, protection IP 65		ERF	●	●








Four Hole Panel Mounting	Code	DH.. DHR..	DH..B DHR..B
--------------------------	------	---------------	-----------------

<p>Panel mounting with heavy duty latching and metal shaft</p>				
	<p>Four hole panel mounting Mounting plate, escutcheon plate and handle of size 0</p>	<p>KN2</p>	<p>●</p>	
	<p>Four hole panel mounting Mounting plate, escutcheon plate and handle of size 1</p>	<p>KN1</p>	<p>●</p>	<p>●</p>
	<p>Four hole panel mounting Mounting plate, escutcheon plate and handle of size 1 and 6 mm square metal shaft</p>	<p>KD1</p>	<p>●</p>	<p>●</p>
<p>Panel mounting with protective cover</p>				
	<p>Four hole panel mounting Protection front IP 40 rear IP 30</p>	<p>EC</p>	<p>●</p>	<p>●</p>
	<p>Four hole panel mounting with additional shaft seal Protection front IP 40 rear IP 30</p>	<p>ED</p>	<p>●</p>	<p>●</p>







Single Hole Mounting		Terminals rotated 90°	Code	DH.. DHR..	DK.. DKR..
	With locking nut and shaft seal, protection IP 65			mm	mm
	Without escutcheon plate	●	FT1 FT1-V	22 22	22 22
	With square escutcheon plate	●	FT2 FT2-V	22 22	22 22
	With size S1 square escutcheon plate and heavy duty latching	●	FT3 FT3-V	22/30 22/30	22/30 22/30
	With size S1 square escutcheon plate and heavy duty latching	●	FH3 FH3-V	22 22	22 22
	With rectangular escutcheon plate	●	FT4 FT4-V	22/30 22/30	22/30 22/30
	With size S1 rectangular escutcheon plate and heavy duty latching	●	FT6 FT6-V	22 22	22 22
	With size S1 rectangular escutcheon plate and heavy duty latching	●	FH4 FH4-V	22 22	22 22
	Mounting key for locking nut		S00 T170 09		


Base Mounting	Terminals rotated 90°	Code	DH.. DHR..	DH..B DHR..B
---------------	-----------------------	------	---------------	-----------------

	<p>Base mounting</p> <p>Base mounting - four hole</p> <p>For four hole base mounting and with integrated simplified door clutch, protection IP 65</p>	<p>●</p>	<p>VE VE-V</p>	<p>● ●</p>	<p>● ●</p>
	<p>For two hole base mounting</p> <p>For two hole base mounting and with integrated simplified door clutch, protection IP 65</p>	<p>●</p>	<p>VF VF-V</p>	<p>● ●</p>	<p></p>
	<p>Snap-on base mounting for track EN 60715</p>	<p>●</p>	<p>VE22 VE22V</p>	<p>● ●</p>	<p></p>
	<p>Snap-on base mounting for track EN 60715 with rectangular escutcheon plate for 45 mm standard knock-out</p>	<p></p>	<p>VF22 VF22V</p>	<p>● ●</p>	<p></p>
	<p>Snap-on base mounting for track EN 60715. Both the escutcheon plate for 45 mm standard knock-out and the handle are adjustable in height.</p>	<p></p>	<p>VE1</p>	<p>● ●</p>	<p></p>
	<p>Snap-on base mounting for track EN 60715 with rectangular escutcheon plate for 45 mm standard knock-out</p>	<p></p>	<p>VE2</p>	<p>●</p>	<p></p>
	<p>Snap-on base mounting for track EN 60715. Both the escutcheon plate for 45 mm standard knock-out and the handle are adjustable in height.</p>	<p></p>	<p>VE21</p>	<p>●</p>	<p></p>
	<p>Snap-on base mounting for track EN 60715 with circular escutcheon plate for 46 mm knock-out</p>	<p></p>	<p>VE3</p>	<p>●</p>	<p></p>
	<p>Base mounting - four hole - with circular escutcheon plate for 46 mm knock-out</p>	<p></p>	<p>VE4</p>	<p>●</p>	<p></p>

Mounting Plates for Plaster Depth Boxes acc. to DIN 49070 and ÖNORM E6508	Code	DH.. DHR..
---	------	---------------

	<p>Plaster depth trim</p>	<p>UE1</p>	<p>●</p>
	<p>With light</p> <p>With facility for light addition</p>	<p>UE2</p> <p>UE3</p>	<p>●</p> <p>●</p>
	<p>Plaster depth trim</p> <p>With light</p> <p>With facility for light addition</p>	<p>UE4</p> <p>UE5</p> <p>UE6</p>	<p>●</p> <p>●</p> <p>●</p>
	<p>For multiple boxes</p>	<p>UE7</p>	<p>●</p>

# Escutcheon Plates

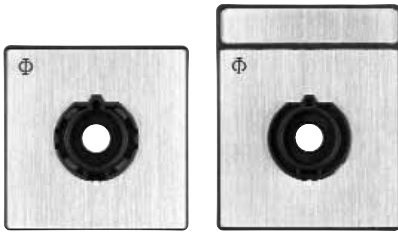

Square and rectangular escutcheon plates are available for each size of switch. The escutcheon plate consists of a frame and a faceplate having the switch positions which is then embossed with hot-foil backing. The escutcheon plate frame is an essential part of the switch and serves as a bearing surface for the handle. If the switch is to be mounted without an escutcheon plate we would recommend for size S1 the handle bearing plate T100-04.

## Standard Letterings Available

(Over 500 standard letterings, special letterings upon request.)

### 30° switching

F022	F141	F158	F703	F023	F137	F142	F159	F701	F704	F152	F709	F026	F035	F153	F169	F024	F143
F160	F221	F222	F224	F025	F034	F036	F037	F038	F039	F139	F144	F147	F149	F150	F151	F219	F258
F259	F273	F280	F329	F384	F708	F053	F161	F297	F298	F306	F307	F001	F040	F052	F229	F355	F018
F019	F029	F030	F154	F155	F165	F166	F183	F184	F301	F302	F321	F332	F333	F334	F335	F374	F711
F712	F002	F021	F033	F041	F055	F305	F319	F054	F003	F042	F138	F255	F299	F308	F353	F350	F351
F004	F014	F017	F020	F027	F028	F031	F032	F043	F049	F135	F156	F157	F162	F167	F168	F187	F189
F303	F304	F336	F337	F347	F348	F710	F713	F714	F734	F005	F044	F136	F140	F702	F006	F010	F045
F015	F050	F007	F011	F046	F008	F012	F047	F016	F051	F009	F013	F048	F748				

### 45° switching

F747	F295	F742	F743	F215	F216	F738	F744	F746	F792	F793	F107	F109	F114	F115	F212	F213	F214
F217	F267	F289	F330	F375	F376	F383	F408	F409	F410	F411	F412	F413	F426	F427	F430	F729	F752
F775	F776	F777	F778	F779	F780	F781	F796	F797	F798	F105	F108	F112	F113	F117	F118	F293	F429
F739	F741	F419	F789	F790	F791	F794	F795	F110	F106	F116	F294	F317	F414	F415	F416	F417	F418
F782	F783	F784	F785	F786	F787	F788	F799	F111	F210	F211	F284	F285	F296	F322	F727	F740	

# Escutcheon Plates

## 60° switching

F070	F087	F088	F089	F133	F197	F198	SYNCHROSCOPE F232	F243	F247	F263	F268	F310	F311	HINDRYBTARE F323	HINDRYBTARE F328	F352	F367
F379	F380	F470	F754	F072	F163	F164	F192	F193	F196	F230	F231	F234	F244	F257	F262	F264	F282
F288	F291	F313	F382	F441	F705	F721	F722	F750	F757	F758	F075	F076	F098	F220	F223	F356	F357
F377	F723	F071	F073	F080	F081	F085	F086	F090	F091	F092	F093	F094	F104	F194	F235	F237	F239
F240	F241	F249	F260	F269	F274	F281	F290	F292	F312	F314	F315	F316	F324	F331	F344	F354	F358
F359	F364	F370	F371	F373	F381	F385	F442	F444	F469	F732	F735	F759	F077	F100	F101	F102	F309
F342	F343	F361	F362	F363	F365	F366	F078	F191	F325	F326	F720	F074	F082	F096	F097	F195	F724
F256	F079	F083	F084	F095	F099	F185	F190	F199	F233	F236	F238	F242	F283	F725	F730	F731	F736
F737																	

## 90° switching

F056	F063	F068	F134	F201	F251	F252	F346	F456	F058	F065	F069	F177	F178	F182	F208	F253	F254
F340	F360	F378	F458	F443	F700	F743	F057	F061	F064	F067	F171	F181	F205	F207	F209	F320	F349
F437	F445	F715	F719	F059	F060	F062	F066	F170	F172	F173	F174	F175	F176	F179	F180	F186	F188
F202	F204	F206	F250	F265	F266	F286	F318	F327	F338	F339	F425	F716	F717	F718	F726	F733	F751
F755	F756																

## Miscellaneous

F119	F130	F122	F126	F125	F129	F225	F248	F246	F261	F341	F345	F287	F123	F127	F145	F146	F148
F706	F707	F245	F120	F124	F128	F131	F121	F132	F749			F990	F991	F801	F802	F803	F804
F805	F806	F807	F808	F809	F810	F811	F812	F813	F814	F815	F816	F817	F818	F819	F820	F821	F822
F823	F824	F825	F826	F827	F828	F829	F830	F831	F832	F833	F834	F835	F837	F838	F839 <sup>1</sup>	F840 <sup>2</sup>	F841 <sup>3</sup>

<sup>1</sup>INTERRUPTEUR PRINCIPAL, OUVERTURE EN POSITION 0 <sup>2</sup>INTERRUPTORE GENERALE, APRIRE SOLO CON MANIGLIA SU 0  
<sup>3</sup>INTERRUPTOR PRINCIPAL, ABRIR ARMARIO SOLO EN POS. "0"

# Handles












Type	Color	Code	Size	
			S0	S1

Type	Color	Code	Size	
			S0	S1

<p>R-Handle</p> 	black red white electro-gray	G001 G002 G003 G007	● ● ● ● ● ● ● ●
<p>F-Handle</p> 	black red white electro-gray	G221 G222 G223 G227	● ● ● ● ● ● ● ●
<p>S-Handle</p>  <p>S0      S1</p>	black red white electro-gray	G301 G302 G303 G307	● ● ● ● ● ● ● ●
<p>P-Handle</p>  <p>S0      S1</p>	black red white electro-gray	G211 G212 G213 G217	● ● ● ● ● ● ● ●
<p>O-Handle</p> 	black red white electro-gray	G321 G322 G323 G327	— ● — ● — ● — ●

<p>I-Handle</p> 	black red white electro-gray	G251 G252 G253 G257	● ● ● ● ● ● ● ●
<p>B-Handle</p> 	black red white electro-gray	G521 G522 G523 G527	● ● ● ● ● ● ● ●
<p>L-Handle</p> 	black red white electro-gray	G501 G502 G503 G507	— ● — ● — ● — ●
<p>K-Handle</p> 	black red white electro-gray	G411 G412 G413 G417	— ● — ● — ● — ●

Country	Authority	Mark or Standard	DH10	DHR10	DH11	DHR11	DH12	DHR12
			DK10 DH10B	DKR10 DHR10B	DK11 DH11B	DKR11 DHR11B	DK12 DH12B	DKR12 DHR12B

USA	Underwriters Laboratories		●	●	●	●	●	●
		or 	●	●	●	●	●	●
Canada	Canadian Standards Association		●	●	●	●	●	●
		or 	●	●	●	●	●	●
Switzerland	Schweizerischer Elektrotechnischer Verein		+	+	+	+	+	+
Denmark	Danmarks Elektriske Materielkontrol		+	+	+	+	+	+
Norway	Norges Elektriske Materielkontrol		+	+	+	+	+	+
Sweden	Svenska Elektriska Materielkontrollanstalten		+	+	+	+	+	+
Finland	Sähkötar-kastuskeskus		+	+	+	+	+	+
Austria	Österreichischer Verband für Elektrotechnik		+	+	+	+	+	+
Federal Republic of Germany	Verband Deutscher Elektrotechniker	VDE 0660 <sup>1</sup>	+	+	+	+	+	+
Great Britain	British Standards Institution	BS EN 60947 <sup>1</sup>	+	+	+	+	+	+
International Electrical Commission (IEC) Recommendation		IEC 60947 <sup>2</sup>	+	+	+	+	+	+
Russian Federation	GOST	 CH01	●	+	●	+	●	+

- Switch approved
- + Switch conforms to requirements

<sup>1</sup>Industrial switchgear is not required to bear a symbol but must conform to requirements. By referring to the specific specification on the product the manufacturer implies that these requirements have been met.

<sup>2</sup>IEC does not operate an approval scheme.

<b>Selection Data</b>	DH10	DHR10
	DK10	DKR10
	DH10B	DHR10B

<b>Rated Insulation Voltage <math>U_e</math></b>	IEC 60947-3 <sup>1</sup> , EN 60947-3 <sup>1</sup> VDE 0660 part 107 <sup>1</sup> North America Min. operational voltage	V V V	690 600 20	690 600 20
<b>Rated Impulse Withstand Voltage <math>U_{imp}</math></b> <sup>1</sup>		kV	6	6
<b>Rated Thermal Current <math>I_{th}</math></b>	IEC 60947-3, EN 60947-3 VDE 0660 part 107 North America	A A	16 15	16 15
<b>Rated Operational Current <math>I_e</math></b>				
AC-21A Switching of resistive loads, including moderate overloads	IEC 60947-3, EN 60947-3 VDE 0660 part 107	A	16	16
AC-15 Switching of control devices, contactors, valves etc.	IEC 60947-3, EN 60947-3 VDE 0660 part 107	A	5 3	5 3
Pilot Duty North America	Heavy	VAC	600	600
Ampere Rating Resistive or low inductive loads	North America	A	15	15
<b>Short Circuit Protection</b>				
Max. fuse size	(gL-characteristic)	A	16	16
Rated short-time withstand current	(1s-current)	A	120	120
<b>Rated Utilization Category</b>	IEC 60947-3, EN 60947-3 VDE 0660 part 107			
AC-3 Direct-on-line starting, star-delta starting	3 phase 3 pole	220 V-240 V 380 V-440 V 500 V 660 V-690 V	kW	2,2 3,7 3,7 3,7
	1 phase 2 pole	110 V-120 V 220 V-240 V 380 V-440 V	kW	0,37 1,1 2,2
AC-23A Frequent switching of motors or other high inductive loads	3 phase 3 pole	220 V-240 V 380 V-440 V 500 V 660 V-690 V	kW	3 5,5 5,5 4
	1 phase 2 pole	110 V-120 V 220 V-240 V 380 V-440 V	kW	0,55 1,5 2,5
<b>Ratings</b>	North America			
Standard motor load	3 phase	110 V-120 V	HP	0,75
DOL-Rating (similar AC-3)	3 pole	220 V-240 V 440 V-600 V	HP	1,5 3
	1 phase 2 pole	110 V-120 V 220 V-277 V 440 V-600 V	HP	0,25 0,5 1
<b>Max. Permissible Wire Gage</b> - Use copper wire only				
Single-core or stranded wire		mm <sup>2</sup> AWG	2x2,5 2x12	- -
Flexible wire (sleeving in accordance with DIN 46228) Flexible AWG wires (without sleeve)		mm <sup>2</sup> AWG	2x2,5(1,5) 2x14	- -
Connection with insulated ring and fork type terminals		mm	-	≥3,2
Internal diameter		mm	-	≤7,4
External diameter		mm	6,3	-
Connection with quick connect terminations		mm		
<b>Ambient Temperature of Stages</b> <sup>2</sup>	open at 100 % $I_{th}$ enclosed at 100 % $I_{the}$			55 °C during 24 hours with peaks up to 60 °C 35 °C during 24 hours with peaks up to 40 °C

<sup>1</sup>Valid for lines with grounded common neutral termination, overvoltage category III, pollution degree 3. Values for other supply systems on request.

<sup>2</sup>For electromagnetic optional extras see additional data in Catalog 101.



<b>Selection Data</b>	DH11	DHR11	DH12	DHR12
	DK11	DKR11	DK12	DKR12
	DH11B	DHR11B	DH12B	DHR12B

<b>Rated Insulation Voltage <math>U_e</math></b>	IEC 60947-3 <sup>1</sup> , EN 60947-3 <sup>1</sup> VDE 0660 part 107 <sup>1</sup>	V	600	600	600	600
	North America	V	600	600	600	600
	min. voltage	V	1 <sup>2</sup>	1 <sup>2</sup>	6	6
<b>Rated Impulse Withstand Voltage <math>U_{imp}</math></b>			on request			
<b>Rated Thermal Current <math>I_{\theta}/I_{th}</math></b>	IEC 60947-3, EN 60947-3 VDE 0660 part 107	A	6	6	6	6
	North America	A	6	6	6	6
<b>Rated Operational Current <math>I_e</math></b>  AC-21A Switching of resistive loads, including moderate overloads	IEC 60947-3, EN 60947-3 VDE 0660 part 107					
	North America					
	1 V/6 V	A	6/3	6/3	-/6	-/6
	12 V/24 V	A	2/1	2/1	6/5	6/5
	48 V/60 V	A	0,8/0,7	0,8/0,7	4/3,7	4/3,7
	110 V	A	0,4	0,4	3	3
	220 V-240 V	A	0,2	0,2	2	2
	380 V-400 V	A	0,13	0,13	1,3	1,3
440 V/500 V	A	0,1/0,09	0,1/0,09	1/0,9	1/0,9	
550 V/600 V	A	0,08/0,05	0,08/0,05	0,8/0,5	0,8/0,5	
<b>Short Circuit Protection</b>						
	Max. fuse size (glass-tube, quick)	A	6	6	6	6
Rated short-time withstand current (1s-current)		A	40	40	65	65
<b>DC Switching Capacity<sup>4</sup></b>  DC-21B Resistive load $T \leq 1$ ms	IEC 60947-3, EN 60947-3 VDE 0660 part 107					
	North America					
	1 V/6 V	A	4/2,5	4/2,5	-/4	-/4
	12 V/24 V	A	1,5/0,8	1,5/0,8	3/2,2	3/2,2
	48 V/60 V	A	0,3/0,27	0,3/0,27	1,2/1	1,2/1
	110 V	A	0,2	0,2	0,6	0,6
	220 V-240 V	A	0,1	0,1	0,3	0,3
	380 V-400 V	A	0,06	0,06	0,2	0,2
440 V/500 V	A	0,05/0,04	0,05/0,04	0,15/0,12	0,15/0,12	
550 V/600 V	A	0,03/0,02	0,03/0,02	0,1/0,1	0,1/0,1	
<b>Max. Permissible Wire Gage</b> - Use copper wire only						
	Single-core or stranded wire	mm <sup>2</sup>	2x2,5	-	2x2,5	-
		AWG	2x12	-	2x12	-
	Flexible wire (sleeving in accordance to DIN 46228)	mm <sup>2</sup>	2x2,5(1,5)	-	2x2,5(1,5)	-
	Flexible AWG wires (without sleeve)	AWG	2x14	-	2x14	-
	Connection with insulated ring and fork type terminals					
	Internal diameter	mm	-	≥3,2	-	≥3,2
	External diameter	mm	-	≤7,4	-	≤7,4
	Connection with quick connect terminations	mm	6,3	-	6,3	-
<b>Ambient Temperature of Stages<sup>3</sup></b>	open at 100 % $I_{\theta}/I_{th}$ enclosed at 100 % $I_{the}$		55 °C during 24 hours with peaks up to 60 °C 35 °C during 24 hours with peaks up to 40 °C			

<sup>1</sup>Valid for lines with grounded common neutral termination, overvoltage category III, pollution degree 3. Values for other supply systems on request. <sup>2</sup>Values for lower voltages on request. <sup>3</sup>For electromagnetic optional extras see additional data in Catalog 101.

<sup>4</sup>Values for switches with spring return on request.

**Two or Four Hole Panel Mounting**

	DH10-DHR12 <sup>3</sup>	DK10-DKR12	DH10B-DHR12B
<b>A</b>	48 1.89	48 1.89	64 2.52
<b>B</b>	42 1.65	42 1.65	56 2.20
<b>C</b>	4 .16	4 .16	4 .16
<b>D1</b>	5 .20	5 .20	5 .20
<b>E</b>	8-15 .31-.59	15-19 .59-.75	10-15 .39-.59
<b>E22</b>	11-15 .43-.59	-	-
<b>EF</b>	15-19 .59-.75	-	19-22 .75-.87
<b>E</b>	30 1.17	-	-
<b>F</b>	36(48) 1.42(1.89)	-	48 1.89
<b>M<sup>2</sup></b>	5,5 .22	-	5,5 .22

<sup>2</sup>M, additional length for mounting ER, ERF only  
<sup>3</sup>Dimensions in ( ) for ER, ERF mounting plate only

**EG**  
**EGF**



	DH10-DHR12
<b>A</b>	64 2.52
<b>B</b>	42 1.65
<b>C</b>	4 .16
<b>D1</b>	5 .20
<b>EG</b>	10-15 .31-.59
<b>EGF</b>	19-22 .75-.87
<b>E</b>	48 1.89
<b>M</b>	6,7 .26

**KN1**  
**KD1**  
**KN2**

<b>KN2</b>	DH10-DHR12	<b>KN1</b> <b>KD1</b>	DH10-DHR12	DH10B-DHR12B
<b>A</b>	48 1.89	<b>A</b>	64 2.52	64 2.52
<b>B</b>	42 1.65	<b>B</b>	42 1.65	56 2.20
<b>C</b>	4 .16	<b>C</b>	4 .16	4 .16
<b>D1</b>	5 .20	<b>D1</b>	5 .20	5 .20
<b>D2</b>	8-15 .31-.59	<b>D2</b>	10-15 .31-.59	10-15 .31-.59
<b>E</b>	36 1.42	<b>E</b>	48 1.89	48 1.89
<b>M</b>	5,2 .20	<b>M</b>	4,7 .19	12 .47

**Four Hole Panel Mounting or Single Hole Mounting and Base Mounting**

**EC  
ED**




Fluchten L


	DH10- DHR12	DH10B- DHR12B
1	103 4.06	127 5.00
2	103 4.06	127 5.00
3	103 4.06	127 5.00
4	-	127 5.00
5	-	139,5 5.49
6	-	164,5 6.48
7	-	177 6.97

	DH10- DHR12	DH10B- DHR12B
<b>A</b>	64 2.52	64 2.52
<b>B</b>	68 2.68	88 3.46
<b>C</b>	4 .16	4 .16
<b>D1</b>	5 .20	5 .20
<b>D2</b>	8-15 .31-.59	10-15 .39-.59
<b>E</b>	48 1.89	48 1.89
<b>M</b>	2 .08	2 .08



**FT1...  
FT3...**




**FH3...  
FT2...  
FT4...**





**FH4...  
FT6...**



**FH3...  
FH4...  
FT1...  
FT2...  
FT6...**






**FT3...  
FT4...**



	DH10- DHR12	DK10- DKR12
<b>A/E</b>	48 1.89	48 1.89
<b>FH3...</b>	64 2.52	64 2.52
<b>FH4...</b>	64 2.52	64 2.52
<b>B</b>	42 1.65	42 1.65
<b>C</b>	6 .24	6 .24
<b>F</b>	59 2.32	59 2.32
<b>FH4...</b>	78.5 3.09	78.5 3.09
<b>M</b>	18,2 .72	3,7 .15
<b>FH3...</b>	25,2 .99	3,7 .15
<b>FH4...</b>	25,2 .99	25,2 .99

**VE1**




	DH10- DHR12	DH10B- DHR12B
<b>A</b>	48 1.89	64 2.52
<b>B</b>	42 1.65	56 2.20
<b>C</b>	10,5 .41	13,5 .53
<b>D</b>	8-15 .31-.59	10-15 .39-.59
<b>E</b>	36 1.42	48 1.89
<b>F</b>	48 1.89	70 2.76


<sup>1</sup>see page 43

Base Mounting


VE  
VE-V

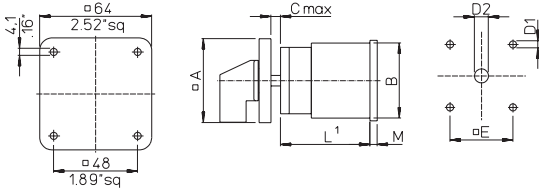


VE22  
VE22V

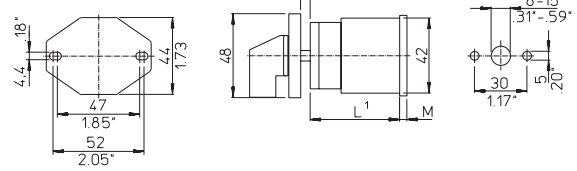

VF  
VF-V

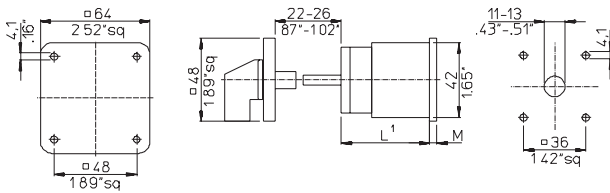


VF22  
VF22V

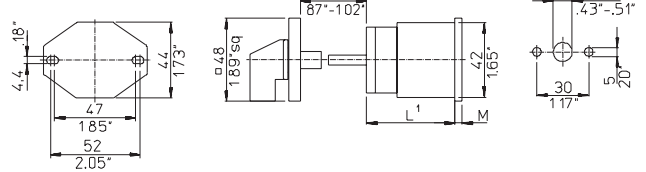


	DH10-DHR12	DH10B-DHR12B		DH10-DHR12	DH10B-DHR12B
<b>A</b>	48 1.89	64 2.52		<b>E</b>	36 1.42
<b>B</b>	42 1.65	56 2.20	<b>VE</b>	<b>M</b>	3,2 .13
<b>C</b>	10,5 .41	13,5 .53	<b>VE22</b>	<b>M</b>	1,9 .07
<b>D1</b>	5 .20	5 .20	<b>VF</b>	<b>M</b>	3,2 .13
<b>D2</b>	8-15 .31-.59	10-15 .39-.59	<b>VF22</b>	<b>M</b>	1,9 .07


VE2

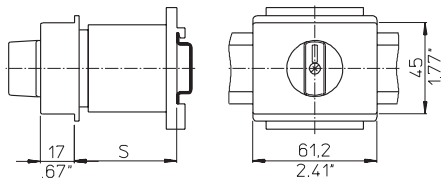


VE3

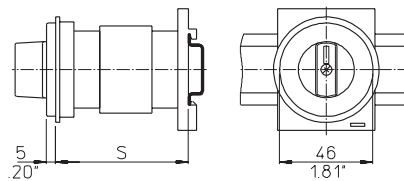

VE21

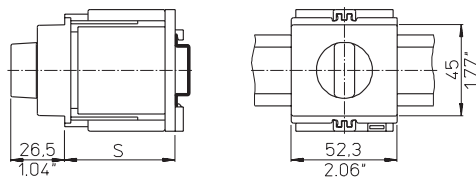


VE4

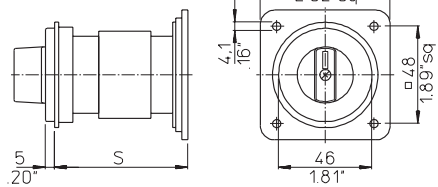


	VE2 DH10-DHR12 Max. no. of stages	VE3 DH10-DHR12 Max. no. of stages	VE4 DH10-DHR12 Max. no. of stages	S <sub>min.</sub>	VE21 DH10-DHR12 No. of stages
<b>S</b> = 46 1.80	1	-	-	44 1.73	1
<b>S</b> = 50 1.97	1	1	1	54 2.13	2
<b>S</b> = 61 2.40	2	1	1	72 2.83	3
<b>S</b> = 67 2.64	2	2	2		
<b>S</b> = 69 2.70	2	2	2		

**Dimensions**      mm  
                              inch

**Wall Mounting, Escutcheon Plates and Additional Length**

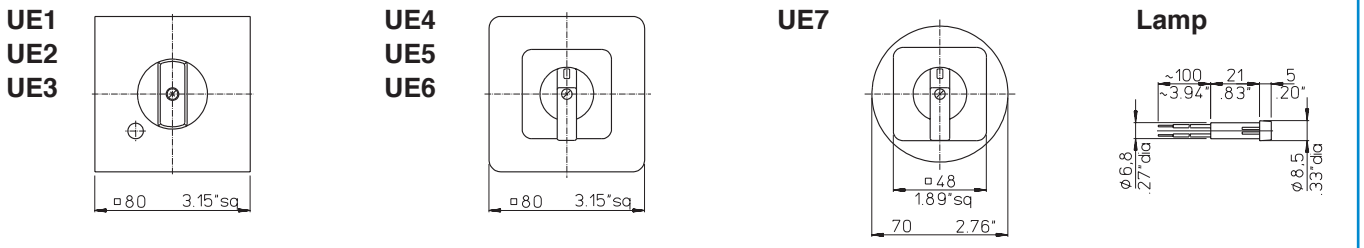


**Escutcheon plates for mounting E, EF, ER, ERF, EG, EGF, KN1, KD1, KN2, EC, ED, VE, VE1, VF**

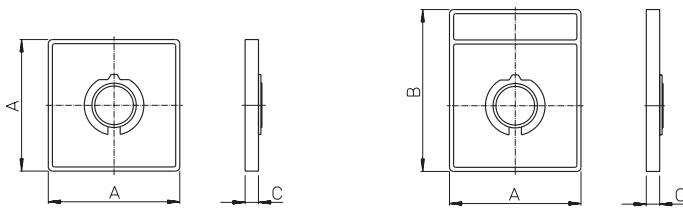

Size	A	B	C
<b>S0</b>	48 1.89	59 2.32	6.7 .26
<b>S1</b>	64 2.52	78 3.07	7.4 .29

**Quick connects for switches DH and DK (page 4)**

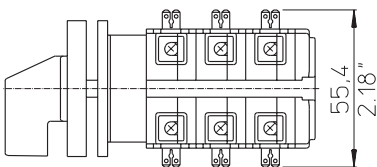

**Length L**

Stages	DH10 DH11 DH12	DHR10 DHR11 DHR12	DK10 DK11 DK12	DKR10 DKR11 DKR12	DH10B DH11B DH12B	DHR10B DHR11B DHR12B
<b>1</b>	43,5 1,71	43,5 1,71	61 2,4	61 2,4	48,9 1,93	48,9 1,93
<b>2</b>	61 2,4	61 2,4	78,5 3,09	78,5 3,09	66,4 2,61	66,4 2,61
<b>3</b>	78,5 3,09	78,5 3,09	96 3,78	96 3,78	83,9 3,30	83,9 3,30
<b>4</b>	96 3,78	96 3,78	113,5 4,47	113,5 4,47	101,4 3,99	101,4 3,99
<b>5</b>	113,5 4,47	113,5 4,47	131 5,16	131 5,16	118,9 4,68	118,9 4,68
<b>6</b>	131 5,16	131 5,16	148,5 5,85	148,5 5,85	136,4 5,37	136,4 5,37
<b>7</b>	148,5 5,85	148,5 5,85	166 6,54	166 6,54	153,9 6,06	153,9 6,06
<b>8</b>	166 6,54	166 6,54	183,5 7,22	183,5 7,22	171,4 6,75	171,4 6,75
<b>9</b>	183,5 7,22	183,5 7,22	201 7,91	201 7,91	188,9 7,44	188,9 7,44
<b>10</b>	201 7,91	201 7,91	218,5 8,60	218,5 8,60	206,4 8,13	206,4 8,13
<b>11</b>	218,5 8,6	218,5 8,6	236 9,29	236 9,29	223,9 8,81	223,9 8,81
<b>12</b>	236 9,29	236 9,29	253,5 9,98	253,5 9,98	241,4 9,50	241,4 9,50

---

# The Range of “Blue Line” Switchgear

Technical literature covering the following products is available on request.

	Catalog Number
<b>Main Switches and Main Switches with Emergency Function 16 A-315 A</b> <b>Maintenance Switches 20 A-315 A</b> <b>Switch Disconnectors 20 A-315 A</b> According to IEC 60947-3, EN 60947-3, VDE 0660 part 107, IEC 60204, EN 60204 and VDE 0113	<b>500</b>
<b>CL Switches 10 A-20 A</b> <b>C, CA and CAD Switches 10 A-315 A and L Switches 350 A-2400 A</b> C, CA and CAD switches are designed for universal application. They are recommended for instrument, isolator, double-throw and motor control. L switches are designed for load and off-load applications. They are used to switch resistive or low inductive loads.	<b>100</b>
<b>Optional Extras and Enclosures</b> The complete product line, a large number of optional extras is available, including door interlocks, push-pull devices, cylinder and padlock attachments, control and indicator devices, AC motor drives, as well as enclosures, both insulated and metal.	<b>101</b>
<b>A and AD Switches 6 A-25 A</b> A and AD switches have 4 contacts in each switching stage. These switches provide an extensive range of switch functions and require a minimum mounting depth. Up to 36 switching positions are possible, with availability of 48 contacts per 12 stage switch column.	<b>110</b>
<b>CG, CH and CHR Switches 10 A-25 A</b> Ultra compact CG, CH and CHR switches are ideally suited for control and instrumentation applications. Switch terminals are “finger-proof” and conveniently accessible for wiring and are delivered open. All CG4 switches offer specially designed gold plated contacts or H-bridges with “cross-wire” contact systems, which facilitates their use in electronic circuitry and chemically aggressive environments.	<b>120</b>
<b>DH, DHR, DK and DKR Switches 6 A-16 A</b> DH, DHR, DK and DKR switches incorporate unique corrosion resistant contacts that permit operation on system voltage as low as 1 V. They have fully enclosed and protected contacts which can be operated either by rotary and/or lateral handle movement. D switches are used in calibration and semiconductor circuits. They are also used for relay and contactor control.	<b>130</b>
<b>X Switches 200 A-630 A</b> X switches can be applied for load, tap and gang switching duties. They incorporate 6 contacts in each switching stage. Their compact design provides a minimum length dimension for mounting purposes.	<b>140</b>
<b>KG Switches 20 A-315 A and KH and KHR Switches 16 A-80 A</b> KG, KH and KHR switches are excellent circuit interruptors. They have high through fault and fault making capacities and are especially designed for use as isolators and safety switches for machine tools, distribution panels and switchboards. KG ON/OFF switches offer unusually high dimensioned air and creepage distances between terminals which are designed for time saving “straight-line” wiring. ON/OFF switches are available with up to 8 poles and double-throw switches are available with up to 4 poles.	<b>150</b>
<b>Contactors 16 A-115 A and Motor Starters 1,1 kW-55 kW</b> These include control relays, motor contactors, two and four pole output contactors, heating contactors, thermal overload relays.	<b>200</b>
<b>Push Buttons and Pilot Lights, 22,5 mm Ø</b> A complete range of state-of-the-art push buttons and pilot lights represent an ideal combination of functional security and economical efficiency in a modular design.	<b>302</b>



